



## S LNA - WG INPUT PORT

2.20-2.30 GHz  
34K

### S BAND LNA/LNB RANGE FOR TELEMETRY, TRACKING & COMMANDING (TTC)

Using **cutting-edge technology**, the new S LNA family offers outstanding performance in outdoor operations

#### INNOVATIVE TECHNOLOGY

State-of-the-art technology provides a very low noise figure at S band: 2.20-2.30 GHz, with superior performance from a highly compact unit.

#### EFFICIENCY & RELIABILITY

Each unit is fully tested in an environmental chamber and delivered with a complete factory acceptance test report.

Advanced design and construction mean the equipment can be operated in the toughest environments.

Exceptional performance combined with reliability and cost effectiveness.

#### CONFIGURABILITY

Several options to configure the product at factory are available, including gain, VSWR and noise temperature. Other port configurations, such as coaxial connector can also be supplied, upon request.



#### KEY FEATURES

- \* TTC
- \* Superior performance
- \* High reliability & efficiency
- \* Ultra-low noise figure
- \* High gain & low ripple
- \* Low input & output VSWR
- \* Fault alarm
- \* Compact size & lightweight
- \* Weatherproof
- \* Wide operating temperature range
- \* Redundant configurations (1:1, 1:2, N:1)

### ELECTRICAL

Operating frequency range	2.20-2.30 GHz
Noise temperature	<34 K
Noise figure	<0.48 dB
Input VSWR	<1.4:1
Output VSWR (50 Ω)	<1.5:1
Gain	>50 dB
Gain flatness	1 dB pp maxv
Gain variation over temperature	±1.5 dB
Output P1dB	>22 dBm
3 <sup>rd</sup> OIP	>30 dBm
Spurious	<-60 dBc

### POWER SUPPLY & MONITORING

Input voltage	+12 to +28 VDC
Current consumption	<300 mA @15 VDC
Fault alarm circuitry	Form-C contact closure

### INTERFACES & PHYSICAL

Dimensions (L x W x H)	169 x 161 x 103 mm
Weight	1020 gr
Interfaces	RF input flange: CPR430G / N (f) RF output: N (f) DC & monitoring: PT02A10-5P

### ENVIRONMENTAL


Operating temperature	-30 °C to +55 °C
Storage temperature	-40 °C to +85 °C
Humidity	100 % condensing



### OPTIONS

- \* Transmitter reject filter
- \* Coaxial connector
- \* Redundant systems 1:1, 2:1, N:1
- \* Indoor controller
- \* Extended temperature range: -40 °C, + 55 °C

### OUTLINE DRAWING

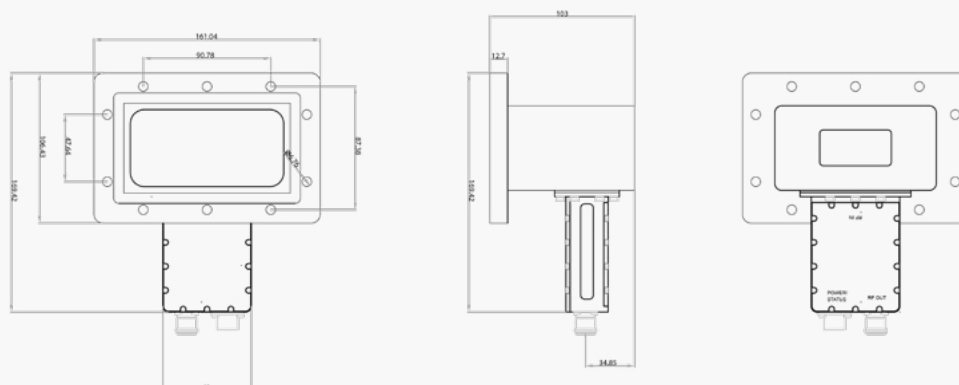

Dimensions are in "mm" and after treatment  
Tolerance according to ISO 2768-f

### TTI CONTACT

sales@ttinorte.es  
www.ttinorte.com

### NOTICE

Information contained in this document is subject to change without notice.

Unless otherwise specified, tests have been done at 23 °C.